





- Washerless cartridge
- Adjustable maximum hot water temperature limit stop
- Instant shut off in the event of hot or cold water failure
- Pressure Balance design maintains $\pm 3^{\circ}\text{F}$ temperature range
- Exposed parts have heavy chrome plated finish
- Single function showerhead 49-107

- 1/2" I.P.S. or 1/2" nominal copper sweat connections
- Brass escutcheon, bonnet and sleeve
- ADA compliant Gerber Hardwater® style zinc metal chrome plated handle operates with less than 5 lbs. of force
- Spacer for thin wall installation
- Optional - Extra large escutcheon/cover plate capable of covering 2-3 holes in wall (92-293)
- Zinc die cast spout with internal diverter

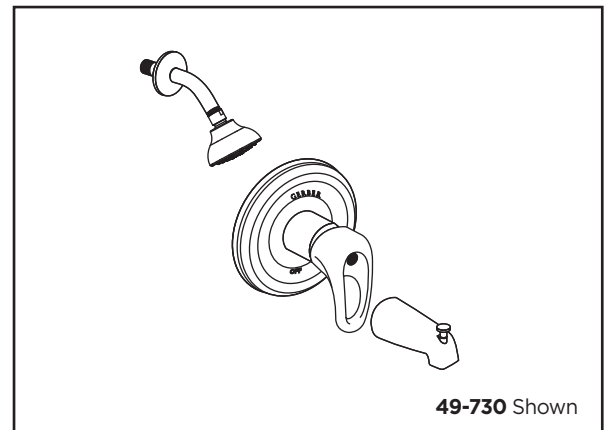

3 13/16"
(97mm)

7 9/16"
(192mm)

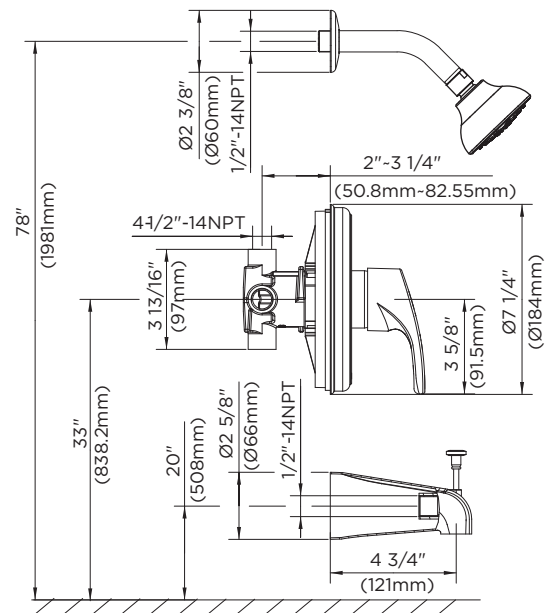

Job Name	
Date	
Model Specified	
Quantity	
Customer	
Contractor	
Architect/engineer	

10/17