



GERBER

G9-090 Series

Waveland™

Tub/Shower Fittings



Features:


- Fit on Gerber PLUS™ washerless valves GS-325(replace GS-315) series and ceramic valves GH-301 series
- Shower at 2.5 gpm @ 80 psi
- Single function showerhead 49-111
- Metal lever handle
- Chrome, brushed nickel or tumbled bronze finish
- Back to back capability
- Diverter tub spout in thread/slip combination
- Fully ADA compliant
- Limited Lifetime Warranty

Standards & Certifications:

- ASME A112.18.1M
- ICC/ANSI A117.1
- IAPMO/cUPC
- Mass Code

Catalog Numbers:

- G9-090** Single Handle and Flange Trim Kit, Chrome
- G9-090-BN** Single Handle and Flange Trim Kit, Brushed Nickel
- G9-090-BR** Single Handle and Flange Trim Kit, Tumbled Bronze
- G9-212** Shower Only Trim Kit, Chrome
- G9-212-BN** Shower Only Trim Kit, Brushed Nickel
- G9-212-BR** Shower Only Trim Kit, Tumbled Bronze
- G9-092-LS** Shower Only Trim Kit, Less Showerhead, Chrome
- G9-092-LS-BN** Shower Only Trim Kit, Less Showerhead, Brushed Nickel
- G9-092-LS-BR** Shower Only Trim Kit, Less Showerhead, Tumbled Bronze
- G9-213** Tub/Shower Trim Kit, Chrome
- G9-213-BN** Tub/Shower Trim Kit, Brushed Nickel
- G9-213--BR** Tub/Shower Trim Kit, Tumbled Bronze
- G9-093-LS** Tub/Shower Trim Kit, Less Showerhead, Chrome
- G9-093-LS-BN** Tub/Shower Trim Kit, Less Showerhead, Brushed Nickel
- G9-093-LS-BR** Tub/Shower Trim Kit, Less Showerhead, Tumbled Bronze

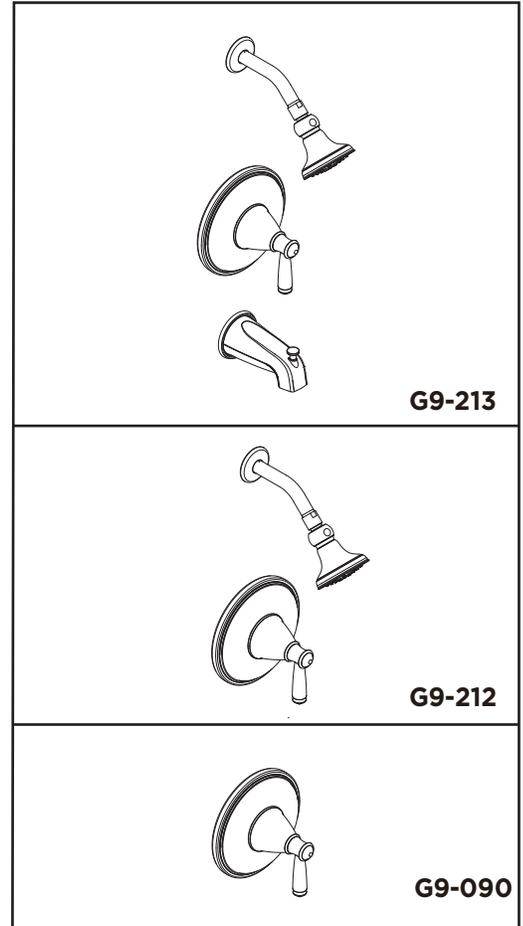

Prefixes Available:

None

Suffixes Available:

- BN: Brushed Nickel
- BR: Tumbled Bronze
- LS: Less Showerhead


Job Name	
Date	
Model Specified	
Quantity	
Customer	
Contractor	
Architect/engineer	

Gerber Toll Free Technical Support: 888-648-6466
www.gerberonline.com





GERBER

G9-090 Series Waveland™ Tub/Shower Fittings

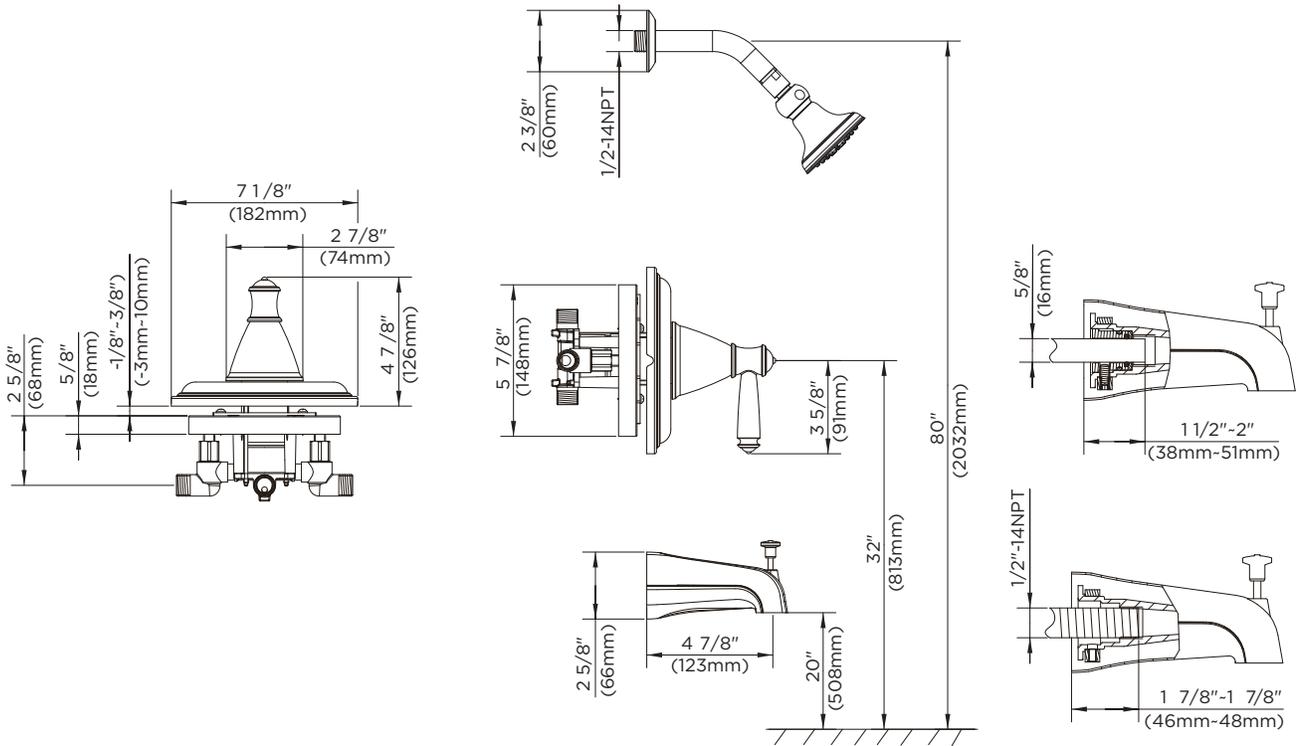

SINGLE HANDLE PRESSURE BALANCE TUB & SHOWER VALVES



Critical Dimensions : Rough-in valve GH-305 (w/stops) & GH-301 (Less stops)

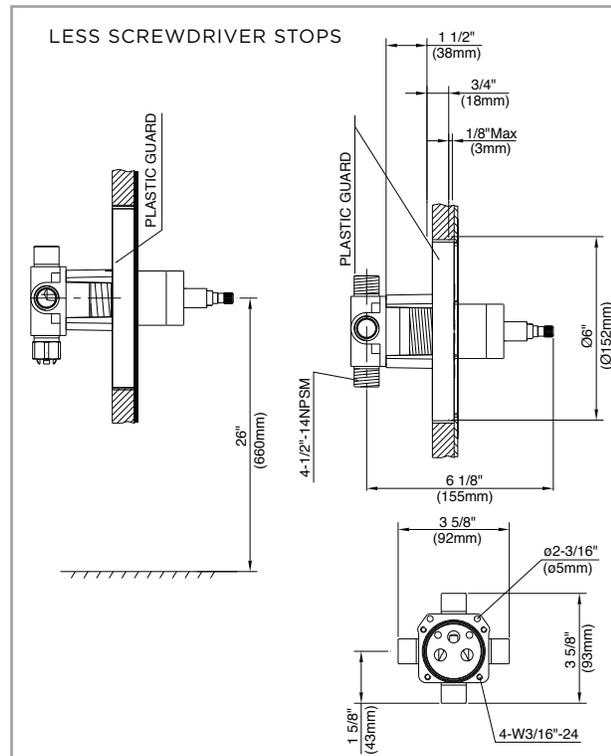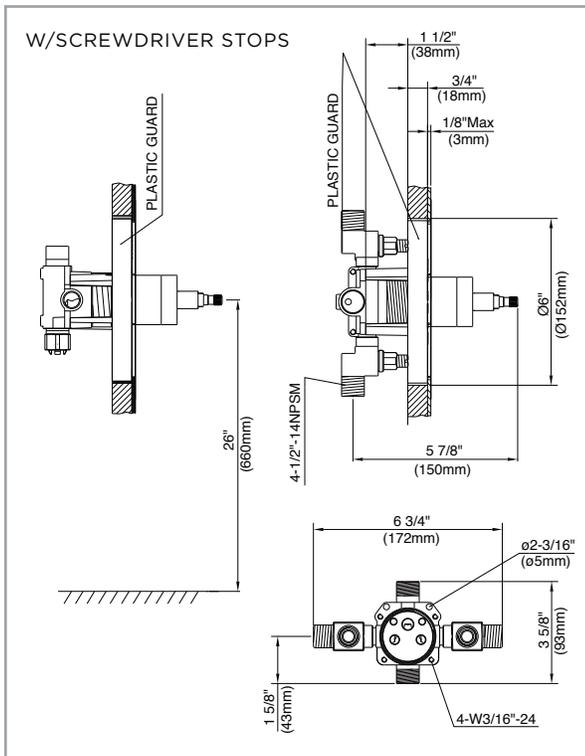



GERBER PLUS VALVES

Critical Dimensions : Rough-in valve GS-325 (w/stops) & GS-324 (w/stops)

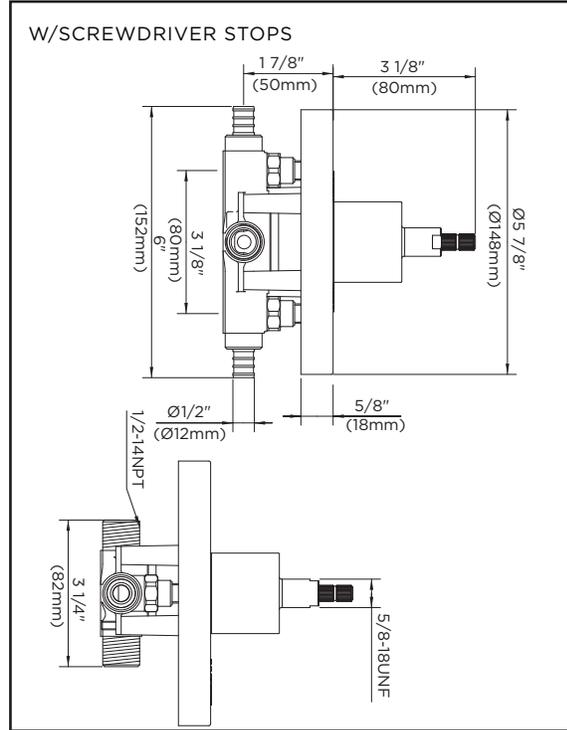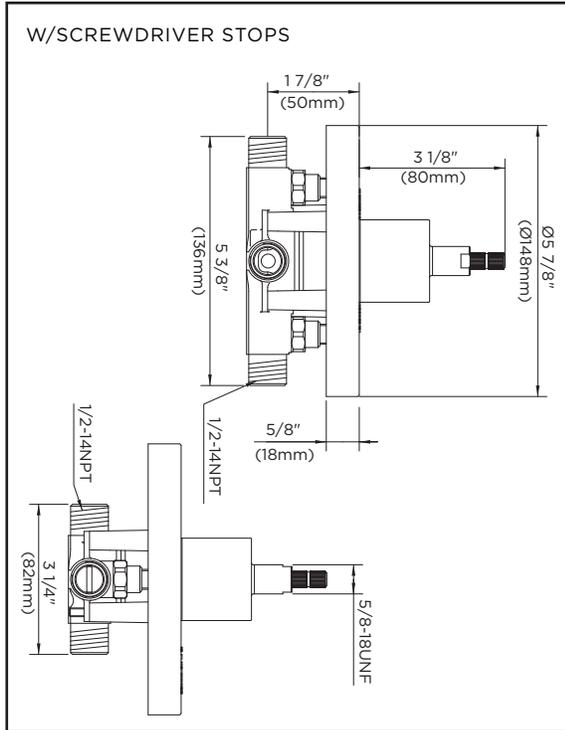

Critical Dimensions : Rough-in valve GS-323 (w/stops) & GS-327(w/stops)

